

Digital WD Outdoor IR Camera (Sony Effio-E)

Products List > D Series > Camera > Digital WD Outdoor IR Camera (Sony Effio-E) > MTC-L632EF

MTC-L632EF

FEATURES


MTC-L632EF



Digital WD
610TVL

MTC-L632EF

- ◆ 1/3" Digital Wide Dynamic Infrared Camera (Sony Effio-E)
- ◆ Color:610TVL, B/W:630TVL
- ◆ 0 Lux (IR LEDs on at 2 Lux)
- ◆ ATR Digital Powerful 128X WDR (52dB)
- ◆ 2D Noise Reduction
- ◆ High Contrast Images
- ◆ Ideal for Backlight Environments
- ◆ Water Resistance:IP67

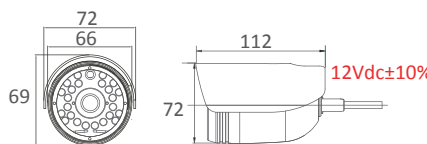

Wall Mount



Light Module

Tol:±0.5 Unit:mm

SPECIFICATIONS

		MTC-L632EF	
		PAL	NTSC
TV System		PAL	NTSC
Image Sensor		1/3" High Resolution CCD	
Number of Total Pixels		795(H)x596(V)	811(H)x508(V)
Resolution ; DSP		Color:610TVL, B/W:630TVL ; Sony Effio-E	
Minimum Illumination		0 Lux	
Wide Dynamic Range		ATR Digital WD (ATR:Adaptive Tone-curve Reproduction) ; 128x Normal Camera (52dB)	
Video Output		1.0Vp-p Composite, 75Ω (BNC)	
Signal to Noise Ratio		More than 52dB (AGC off)	
Gamma Correction		0.45	
Mechanical IR Cut Filter (ICR)		NA	
IR LED ; Working Distance		24 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; Outdoor:15~20m	
Menu		NA	
Title		NA	
Synchronizing System		INTERNAL	
Digital Day&Night Mode		NA	
Electronic Shutter		AUTO (1/50(60)~1/100,000 sec.)	
Automatic Gain Control		AUTO	
White Balance		ATW	
Back Light Compensation		OFF	
Flickerless		OFF	
Dynamic Noise Reduction		2D	
Sense Up		NA	
Face Detection		NA	
Language		NA	
E-Zoom		NA	
Motion Detection ; Privacy		NA	
Timer Clock		NA	
Camera Control Interface		NA	
Automatic IRIS ; Connector		NA	
Lens Mount		Built-in Board Lens	
Lens, Angle of View (H)		Standard: f4.3mm/F2.0/63°, Option: f6.0mm/47.5°, f8.0mm/36.5°	
Water Resistance		IP67	
Max. Breaking Strength		NA	
Power Supply ; Consumption		12Vdc±10%; IR on:4.0W,IR off:2.0W	
Operation ; Storage Temp.		-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity		Maximum: RH80% ; RH90%	
Dimensions		72(DIA)x112(L)mm	
Net Weight		350g	
Accessories Option (Page)		Bracket:Standard with MTB-206(I-4)	