

Outdoor IR Camera

Products List > C Series > Camera > Outdoor IR Camera > MTC-L6438HQ

MTC-L6438HQ

FEATURES




MTC-L6438HQ



MTC-L6438HQ

- ◆ 1/3" Super Hi-Res. Outdoor IR Camera
- ◆ Sony HQ1 / 540 TVL
- ◆ 0 Lux (IR LED on at 2 Lux)
- ◆ 15 IR LEDs for Night Vision
- ◆ Double Glass Lens for Avoiding Halos & Blur
- ◆ Built-in DNR & Sense Up
- ◆ AES/AGC/BLC/FL (ON/OFF)

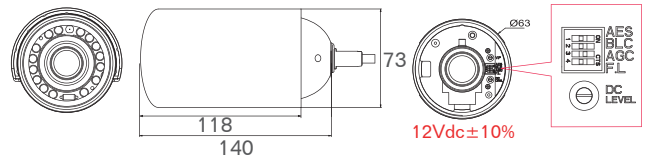

Wall Mount

Water proof back cover



Tol: ±0.5 Unit:mm

SPECIFICATIONS

	MTC-L6438HQ	
	PAL	NTSC
TV System	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)
Resolution ; DSP	540TVL ; Sony HQ1	
Minimum Illumination	0 Lux	
Video Output ; Connector	1.0Vp-p Composite, 75Ω ; BNC	
Signal to Noise Ratio	More than 50dB (AGC Off)	
Gamma Correction	0.45	
Mechanical IR Cut Filter (ICR)	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux)	
IR LED ; Working Distance	15 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; Indoor: 20~30m Outdoor: 15~25m	
Synchronizing System	Internal	
Automatic Electronic Shutter	ON: 1/50(60)sec.~1/100,000sec. / OFF: 1/50(60)sec.	
Automatic Gain Control	ON / OFF	
Automatic White Balance	Automatic	
Back Light Compensation	ON / OFF	
Flickerless	ON / OFF	
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic	
Digital Day&Night Mode	NA	
Automatic IRIS	DC	
Adjustment VR	DC Level	
Lens Mount	Built-in DC Auto IRIS Lens	
Lens, Angle of View(H)	f2.8mm~10mm/F1.2 Aspherical D/N Lens/94.6° ~28.8°	
Water Resistance	IP67	
Max. Breaking Strength	NA	
Power Supply ; Consumption	12Vdc±10% ; IR on:4.3W(0.355A), IR off:2.9W(0.235A)	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity	Maximum: RH80% ; RH90%	
Dimensions	73(DIA)x140(D)mm	
Net Weight	490g	
Accessories Series Option(Page)	Bracket: Standard with MTB-206(H-4)	