

Multi-function Day/Night OSD Camera (Star Light)

Products List > C Series > Camera > Multi-function Day/Night OSD Camera (Star Light) > MTC-MIR03B

MTC-MIR03B

FEATURES

 Mechanical IR Cut Filter (ICR)




MTC-MIR03B



MTC-MIR03B new

- ◆ Excellent Super-high Resolution Technology (CCD)
- ◆ Color Mode: 580TVL; B/W Mode: 600TVL
- ◆ 0.05Lux@F1.0; 0.001Lux@F1.0 (Sense-up)
- ◆ High Sensitivity with Day-Night Function
- ◆ Mechanical IR Cut Filter
- ◆ Motion Detection Function Supported
- ◆ Privacy Masking (24 Programmable Zones)
- ◆ Mirror/ Vertical/ Rotate Function
- ◆ 3D Dynamic Noise Reduction & Sense-up
- ◆ DRC (Dynamic Range Control)
- ◆ HLC (Eclipse the Halation Part such as Headlight, etc.)
- ◆ OSD Setting Menu
- ◆ Remote Control by RS-485

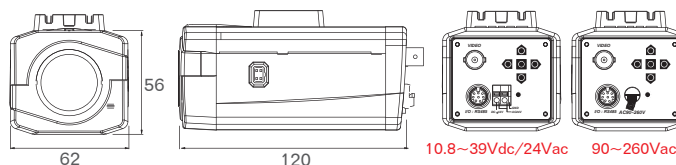

Tol: ±0.5 Unit:mm

SPECIFICATIONS

	MTC-MIR03B	
	PAL	NTSC
TV System	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)
Resolution	Color:580TVL, B/W:600TVL	
Minimum Illumination	Normal:0.05Lux@F1.0(Color), Sense-up:0.001Lux@F1.0, 0Lux with IR light	
Video Output ; Connector	1.0Vp-p Composite, 75Ω ; BNC	
Signal to Noise Ratio	More than 50dB	
Gamma Correction	0.45	
Mechanical IR Cut Filter (ICR)	Automatically Switches (B&W Mode<2Lux, Color Mode>8Lux)	
IR LED ; Working Distance	Compatible with Infrared Illuminator	
Menu	OSD Control or by RS485 Control	
Title	TITLE / LOCATION	
Synchronizing System	INTERNAL / LINE LOCK	
Automatic Electronic Shutter	ON:1/50(60)sec~1/120,000sec. / Manual:1/50(60) sec. FL 1/120(100)sec. 1/250sec. 1/500sec. 1/1Ksec. 1/2Ksec. 1/4Ksec. 1/10Ksec. 1/30Ksec. 1/60Ksec. 1/120Ksec.	
Automatic Gain Control	LOW / MIDDLE / HIGH / OFF	
White Balance	ATW1 / ATW2 / AWC / MANUAL / INDOOR / OUTDOOR	
Back Light Compensation	ON / OFF, POSITION ADJUSTABLE	
Flickerless	Manual Electronic Shutter = FL 1/120(100)sec.	
Dynamic Noise Reduction (2D/3D)	OFF / LOW(2D/3D) / MIDDLE(2D/3D) / HIGH(2D/3D)	
Sense Up	OFF, x2, x4, x8, x16, x32, x64, x128, x256	
Digital Day&Night Mode	DAY / NIGHT / EXT / AUTO	
Mirror Mode	NORMAL / MIRROR / VERTICAL / ROTATE	
Motion Detection ; Privacy	ON / OFF (48 Zones) ; ON / OFF (24 Programmable Zones, Color, Mosaic)	
Automatic IRIS ; Connector	DC ; D4 IRIS Jack	
Lens Mount	C / CS mount (With Adaptor)	
Lens, Angle of View(H)	Lens Option: Please See the Page of Lens Series	
Power Supply, Consumption	10.8~39Vdc/24Vac, 90~260Vac ; 3.0W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity	Maximum:RH80% ; RH90%	
Dimensions	62(W)x56(H)x120(L)mm	
Net Weight	300g	
Accessories Series Option(Page)	Lens:SHV-3010DAI(H-8), SHV-IR7550DAI(H-7) ; Bracket:MTB-101, MTB-102(H-4) ; Housing(H-5)	

10V21