

Day/Night Camera (HQ1)

Products List > C Series > Camera > Day/Night Camera (HQ1) > MTC-MIR8392EXDN, MTC-MIR8392DN

MTC-MIR8392EXDN MTC-MIR8392DN

MTC-MIR8392EXDN



MTC-MIR8392DN



FEATURES



Mechanical IR Cut Filter (ICR)




MTC-MIR8392EXDN

- ◆ 1/3" Sony Exview HAD CCD
- ◆ Sony HQ1/ 540TVL/ 0.05 Lux@F1.0
- ◆ Mechanical IR Cut Filter
- ◆ Color Mode Switches to B/W Mode
- ◆ AES/S.AGC/BLC/FLC (ON/OFF)
- ◆ Video/DC IRIS Control
- ◆ Built-in DNR & Sense Up

MTC-MIR8392DN

- ◆ 1/3" Sony Super HAD CCD II
- ◆ Sony HQ1/ 540TVL/ 0.08 Lux@F1.0
- ◆ Mechanical IR Cut Filter
- ◆ Color Mode Switches to B/W Mode
- ◆ AES/S.AGC/BLC/FLC (ON/OFF)
- ◆ Video/DC IRIS Control
- ◆ Built-in DNR & Sense Up

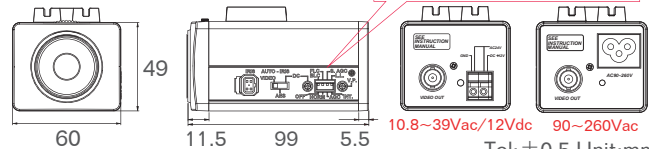

SPECIFICATIONS

	MTC-MIR8392EXDN		MTC-MIR8392DN	
	PAL	NTSC	PAL	NTSC
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" Sony Exview HAD CCD		1/3" Sony Super HAD CCD II	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	795(H)x596(V)	811(H)x508(V)
Resolution ; DSP	Color: 540TVL, B/W: 570TVL ; Sony HQ1			
Minimum Illumination	Color: 0.05Lux@F1.0 B/W: 0.01Lux@F1.0		Color: 0.08Lux@F1.0 B/W: 0.04Lux@F1.0	
Video Output ; Connector	1.0Vp-p Composite, 75Ω ; BNC			
Signal to Noise Ratio	More than 50dB (SUPER AGC off)			
Gamma Correction	0.45			
Mechanical IR Cut Filter (ICR)	Automatically Switches (B/W Mode<2Lux, Color Mode>8Lux)			
IR LED ; Working Distance	Available with Infrared Illuminator			
Synchronizing System	INTERNAL / LINE LOCK (AC Version Only)			
Automatic Electronic Shutter	ON: 1/50(60)sec.~1/100,000sec. / OFF: 1/50(60)sec.			
Automatic Gain Control	AGC / SUPER AGC			
Automatic White Balance	Automatic			
Back Light Compensation	ON / OFF			
Flickerless	ON / OFF			
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic			
Digital Day&Night Mode	NA			
Automatic IRIS ; Connector	VIDEO / DC ; D4 IRIS Jack			
Adjustment VR	DC Level, L.L V-phase			
Lens Mount	C / CS mount (With Adaptor)			
Lens, Angle of View(H)	Lens Option: Please See the Page of Lens Series			
Power Supply ; Consumption	10.8~39Vdc/24Vac:3.5W, 90~260Vac:4.5W			
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum: RH80% ; RH90%			
Dimensions	60(W)x49(H)x99(D)mm			
Net Weight	10.8~39Vdc/24Vac:250g, 90~260Vac:300g			
Accessories Series Option(Page)	Lens: SHV-IR2812DAI, SHV-IR3085DAI, SHV-IR7550DAI(H-7) Bracket: MTB-101, MTB-102(H-4) ; Housing(H-5)			