

Metal Housing Camera

Products List > G Series > Board & Metal Camera > Metal Housing Camera > MTC-807HB, MTC-806HB

MTC-807HB, MTC-806HB

FEATURES




MTC-807HB

- ◆ 1/3" Super Hi-Res. Color Camera
- ◆ Sony HQ1, 540TVL, 0.25Lux@F2.0
- ◆ Built-in DNR & Sense Up

MTC-806HB

- ◆ 1/3" Med-Res. Color Camera
- ◆ Sony Super HAD CCD
- ◆ 420TVL, 0.3Lux@F2.0

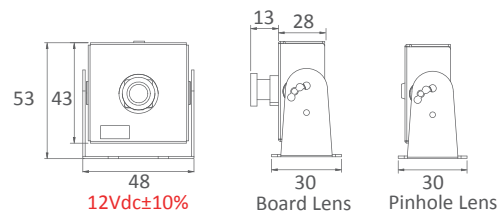

Tol:±0.5 Unit:mm

SPECIFICATIONS

	MTC-807HB		MTC-806HB	
	PAL	NTSC	PAL	NTSC
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II		1/3" Sony Super HAD CCD	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	537(H)x597(V)	537(H)x505(V)
Resolution ; DSP	540TVL ; Sony HQ1		420TVL	
Minimum Illumination	0.25Lux@F2.0		0.3Lux@F2.0	
Video Output	1.0Vp-p Composite, 75Ω			
Signal to Noise Ratio	More than 48dB			
Gamma Correction	0.45			
Synchronizing System	Internal			
Automatic Electronic Shutter	Automatic			
Automatic Gain Control	Automatic			
Automatic White Balance	Automatic			
Back Light Compensation	NA		Automatic	
Flickerless	NA			
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic		NA	
Digital Day&Night Mode	NA			
Automatic IRIS	NA			
Adjustment VR	NA			
Lens Mount	Built-in Board Lens			
Lens, Angle of View(H)	Standard:f3.6mm/F2.0/72.5°, Option:f2.5mm/105°, f2.9mm/90°, f6.0mm/47.5°, f8.0mm/36.5°, f12.0mm/24.5° Pinhole Lens Option:Built-in f3.7 or 4.3mm/F2.0			
Power Supply ; Consumption	12Vdc±10% ; 1.5W		12Vdc±10% ; 1.5W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum: RH80% ; RH90%			
Dimensions	48(W)x53(H)x30(D)mm			
Net Weight	150g			
Accessories Option (Page)	NA			

G Board & Metal Camera

