

## MTC-908, MTC-905

### FEATURES




### MTC-908

- ◆ 1/3" Hi-Res. B/W Board Camera
- ◆ 600TVL/ 0.05Lux@F2.0

### MTC-905

- ◆ 1/3" B/W Board Camera
- ◆ 450TVL/ 0.05Lux@F2.0

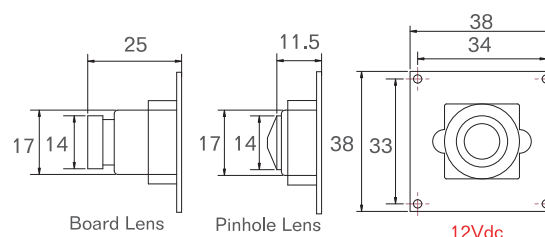

Tol: ±0.5 Unit:mm

### SPECIFICATIONS

	MTC-908		MTC-905	
	CCIR	EIA	CCIR	EIA
TV System	CCIR	EIA	CCIR	EIA
Image Sensor	1/3" Sony Super HAD CCD			
Number of Total Pixels	795(H)x 596(V)	811(H)x508(V)	537(H)x597(V)	537(H)x505(V)
Resolution	600 TVL		450 TVL	
Minimum Illumination	0.05Lux@F2.0			
Video Output	1.0Vp-p Composite, 75Ω			
Signal to Noise Ratio	More than 48dB			
Gamma Correction	0.45			
Synchronizing System	Internal			
Automatic Electronic Shutter	Automatic, 1/50 (60)sec.~1/100,000sec.			
Automatic Gain Control	Automatic			
Automatic White Balance	NA			
Back Light Compensation	NA			
Flickerless	NA			
DNR ; Sense Up	NA			
Digital Day&Night Mode	NA			
Automatic IRIS	NA			
Adjustment VR	NA			
Lens Mount	Built-in Board Lens			
Lens, Angle of View(H)	Standard: f3.6mm/F2.0/72.5° Option: f2.5mm/105°, f2.9mm/90°, f6.0mm/47.5°, f8.0mm/36.5°, f12.0mm/24.5° Pinhole Lens Option: f3.7, f4.3mm/F2.0°			
Power Supply ; Consumption	12Vdc ; 1.2 W			
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum: RH80% ; RH90%			
Dimensions	38(W)x38(H)mm			
Net Weight	15g			
Accessories Series Option(Page)	NA			