

Metal Housing Camera

MTC-908HB, MTC-906HB, MTC-902HB

SPECIFICATIONS



Board Camera
MTC-908HB
MTC-906HB
MTC-902HB



Pinhole Camera
MTC-908HB
MTC-906HB
MTC-902HB

MTC-908HB


1/3" Hi-Res.
B/W Metal Housing Camera

MTC-906HB

1/3" Med-Res.
B/W Metal Housing Camera

MTC-902HB

1/3" Med-Res.
B/W Metal Housing Camera

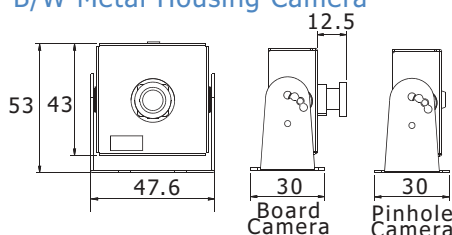

Tol: ± 0.5 Unit:mm

DIMENSIONS

	MTC-908HB		MTC-906HB		MTC-902HB	
	CCIR	EIA	CCIR	EIA	CCIR	EIA
TV System	CCIR	EIA	CCIR	EIA	CCIR	EIA
Image Sensor	1/3" Panasonic CCD		1/3" SONY Super HAD CCD		1/3" B/W CCD	
Number of Total Pixels	753(H) X 582(V)	771(H) X 492(V)	537(H) X 597(V)	537(H) X 505(V)	512(H) X 582(V)	512(H) X 492(V)
Synchronizing System	Internal					
Resolution	550 TVL		450 TVL		420 TVL	
Minimum Illumination	0.05 Lux@F 2.0				0.1Lux@F 2.0	
Gain Control	Automatic					
Electronic Shutter Speed Mode	Automatic, 1/50 (60)sec. ~ 1/100,000sec.					
Back Light Compensation	Automatic					
Signal to Noise Ratio	48dB					
Video Output	1Vp-p Composite / 75Ω					
Gamma Correction	0.45					
Power Supply	12Vdc					
Power Consumption	1.2W					
Lens/Angle of View(H)	Board Lens: Standard: f3.6mm/F2.0 / 53° Options: f2.1mm/130°, f2.5mm/92.5°, f2.9mm/88°, f6.0mm/47.5°, f8.0mm/36.5°, f12.0mm/24.5°, f16.0mm/17.5°					
Pinhole Lens	Options: f3.7 or 4.3mm / F2.0					
Operation Temperature	-10°C ~ +50°C					
Operation Humidity	RH85% or less					
Storage Temperature	-20°C ~ +60°C					
Dimensions	47.6 X 53 X 30mm					
Weight	180 g					

