

# Smoke Detector Covert Camera

Products List > F Series > Special Camera > Smoke Detector Covert Camera > MTC-305DHQ, MTC-305D

## MTC-305DHQ, MTC-305D

### FEATURES




### MTC-305DHQ

- ◆1/3" Super Hi-Res. Color Camera
- ◆Smoke Detector Covert Camera
- ◆Sony HQ1, 540TVL, 0.25Lux@F2.0
- ◆Built-in DNR & Sense Up

### MTC-305D

- ◆1/3" Med-Res. Color Camera
- ◆Smoke Detector Covert Camera
- ◆420TVL, 0.3Lux@F2.0

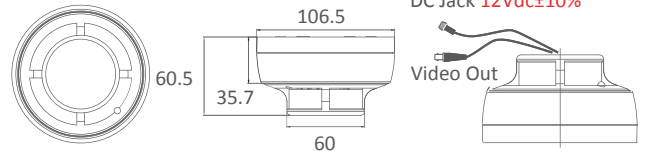

Tol:±0.5 Unit:mm

### SPECIFICATIONS

MTC-305DHQ		MTC-305D		
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II		1/3" Sony Super HAD CCD	
Number of Total Pixels	795(H) X 596(V)	811(H) X 508(V)	537(H) X 597(V)	537(H) X 505(V)
Resolution ; DSP	540TVL ; Sony HQ1		420 TVL	
Minimum Illumination	0.25Lux@F2.0		0.3Lux@F2.0	
Video Output ; Connector	1.0Vp-p Composite, 75Ω (BNC)			
Signal to Noise Ratio	More than 48dB			
Gamma Correction	0.45			
Synchronizing System	Internal			
Automatic Electronic Shutter	Automatic, 1/50(60)~1/100,000 sec.			
Automatic Gain Control	Automatic			
Automatic White Balance	Automatic			
Back Light Compensation	NA		Automatic	
Flickerless	NA			
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic		NA	
Digital Day&Night Mode	NA			
Automatic IRIS	NA			
Adjustment VR	NA			
Lens Mount	Built-in Board Lens			
Lens, Angle of View(H)	Standard:f2.9mm/F2.0/90° Option:f3.6mm/72.5°, f6.0mm/47.5°, f8.0mm/36.5°			
Power Supply ; Consumption	12Vdc±10% ; 1.5W		12Vdc ±10%; 1.0W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum:RH80% ; RH90%			
Dimensions	106.5(DIA) X 60.5(H) mm			
Net Weight	220g			
Accessories Option (Page)	NA			



11V11

Subject to change without notice

F Special Camera