

Mini Bullet Camera

Products List > F Series > Special Camera > Mini Bullet Camera > MTC-103DN

MTC-103DN




MTC-103DN

FEATURES



MTC-103DN

- ◆ 1/3" Med-Res. Mini Bullet Camera
- ◆ 420TVL, 0.25Lux@F2.0
- ◆ Digital Day&Night Switching Function
- ◆ Water Resistance:IP67

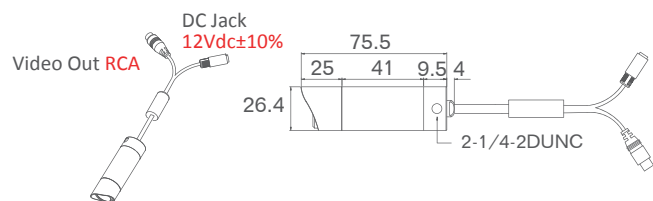

Tol:±0.5 Unit:mm

SPECIFICATIONS

MTC-103DN	
TV System	PAL NTSC
Image Sensor	1/3" Sony Super HAD CCD
Number of Total Pixels	537(H)x597(V) 537(H)x505(V)
Resolution	420TVL
Minimum Illumination	0.25Lux@F2.0
Video Output ; Connector	1.0Vp-p Composite, 75Ω (RCA, Attach BNC Connector)
Signal to Noise Ratio	More than 48dB
Gamma Correction	0.45
Synchronizing System	Internal
Automatic Electronic Shutter	Automatic, 1/50(60)~1/100,000 sec.
Automatic Gain Control	Automatic
Automatic White Balance	Automatic
Back Light Compensation	NA
Flickerless	NA
DNR ; Sense Up	NA
Digital Day&Night Mode	Automatic (B/W Mode<2Lux, Color Mode>5Lux)
Automatic IRIS ; Connector	NA
Adjustment VR	NA
Lens Mount	Built-in Board Lens
Lens, Angle of View(H)	Standard:f3.6mm/F2.0/72.5° Option:f8.0mm/36.5°, f12.0mm/24.5°
Water Resistance	IP67
Max. Breaking Strength	NA
Power Supply ; Consumption	12Vdc±10% ; 1.2W
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C
Operation ; Storage Humidity	Maximum: RH80% ; RH90%
Dimensions	26.4(DIA)x75.5(D)mm
Net Weight	100g
Accessories Option (Page)	Bracket:Standard with MTB-204



10V31